

Technical Datasheet of Technigalva[®] -L(ZnNi0.15%) & Technigalva[®]-L Plus (ZnNi0.15%Bi0.05%)

Uses

Pre-alloyed (lead free) Zinc-Nickel alloy suitable for hot dip galvanising of iron and steel products.

Chemical specification

Chemical specification Guaranteed analysis	Technigalva [®] -L	Technigalva [®] -L Plus
Ni	0.15%±0.03%	0.15%±0.03%
Bi	-	0.05%±0.01%
Pb	≤ 0.010%	≤ 0.010%
Cd	≤ 0.003%	≤ 0.003%
Fe	≤ 0.005%	≤ 0.005%
Sn	≤ 0.005%	≤ 0.005%
Cu	≤ 0.001%	≤ 0.001%
Al	≤ 0.005%	≤ 0.005%
Zn.	balance	balance

Physical data

Physical property	Unit	Value
Density solid	kg/dm ³	7.14
liquid (@ 419°C)	kg/dm ³	6.62
Melting point	°C	419
Superficial tension (@ 450°C)	N/m	0.78
Melting enthalpy	kJ/kg	100
Thermal capacity solid	J/kg K	460
liquid	J/kg K	628


Available shapes/package

Shape/package	Nominal weight (in kg)	Dimensions (in mm)
Slab	25	465 x 232 x 40
Slab Bundle (40 slabs per bundle) Colour marking: sky blue	1000 ± 100	930 x 460 x 440
Block Jumbo 1400 kg Colour marking: dark blue Nickel symbol	1400 ± 100	1532 x 567 x 307

Technical Datasheet of Technigalva[®] -L(ZnNi0.15%) & Technigalva[®]-L Plus (ZnNi0.15%Bi0.05%)


Nyrstar NL Z1 Slab (Ingot)

Nominal mass 25 kg
Dimensions 465 x 232 x 40

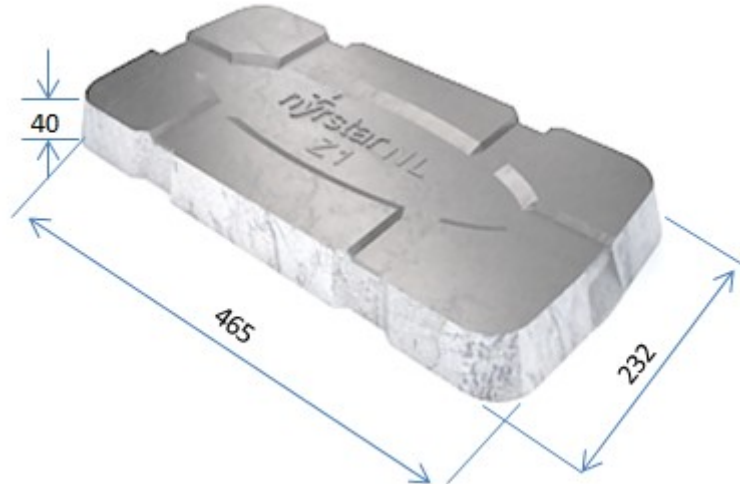

Nyrstar NL Z1 Slab bundle (40 slabs per bundle)

Nominal mass 1000 ± 100 kg
Dimensions 930 x 465 x 440

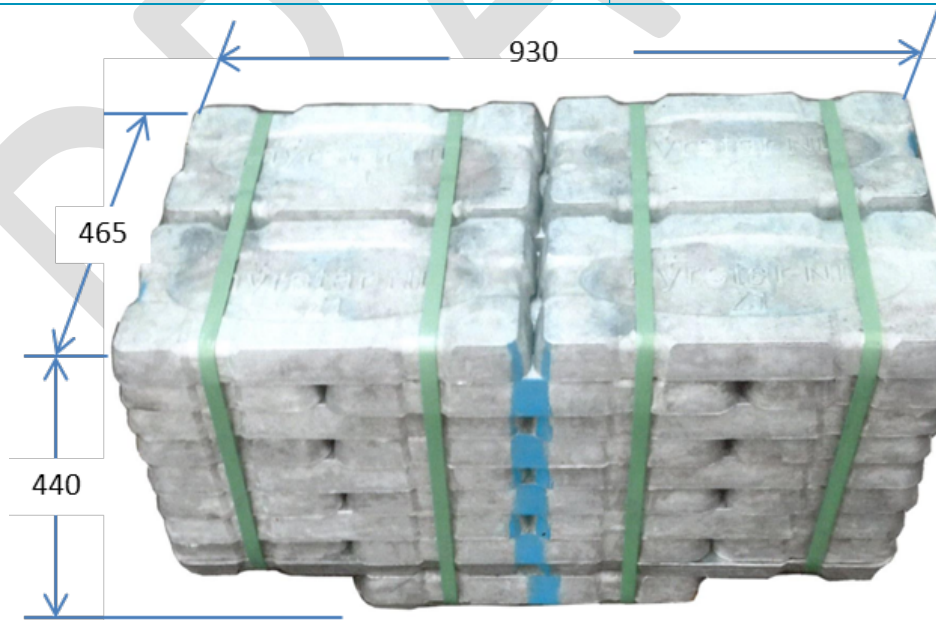

Technical Datasheet of Technigalva[®] -L(ZnNi0.15%) & Technigalva[®]-L Plus (ZnNi0.15%Bi0.05%)

